



Let Lichtefeld handle the business of building while YOU handle building your business!



HOUSTON-JOHNSON, INC.


Distribution Centers

Square Feet : 120,000 s.f.

Project Location : 13200 Complete Court - Louisville, Kentucky

Construction Dates : Start: January 2006 Completion: July 2006

End User : Auto truck part distribution center

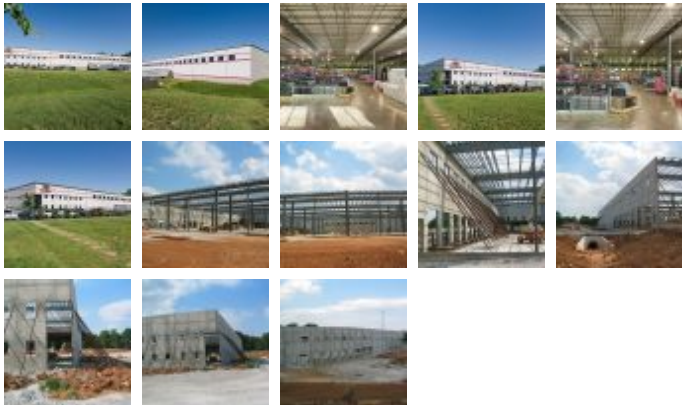

120,000 total s.f. office/warehouse facility. 6,500 s.f. office with 113,500 s.f. warehouse space. This is a Butler steel structural system, Hardmark 2000 on a tilt-wall bearing system. It has an MR-24 standing machine seamed roof system with a concrete tex-flex painted tilt wall system as well as storefront glass. This facility is also equipped with mechanical dock levelers, dock locks, dock lights, loss prevention gates, stop-go lights, insulated overhead doors with view lights. Designed by Berry-Prindle Architects and Butler Manufacturing. Engineered by Butler Manufacturing and QK4 Civil Engineers.

Design and Build project by Lichtefeld, Inc.

